


TOWED LAWN SCARIFIERS

JEREMY

95 cm

PROLINE

Line for the
maintenance of
**parks, gardens and
sports fields**




**PERFECT FOR THE
SPORTS FIELD**




**PERFECT FOR
RENTAL**

**COMPOSED THE POWER RAKE SUITABLE
FOR YOUR LAWN**

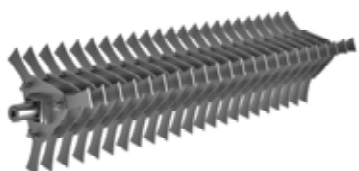

MOVABLE KNIVES

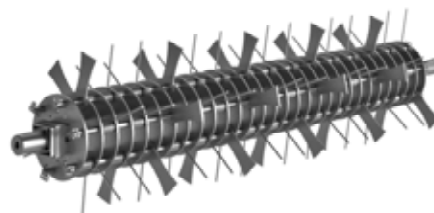

SPRING & KNIVES



Long lasting blade with anti-wear thermal treatment



Gardening and cleaning machines, handlers and made to last in time

The details make the difference of Agrinova MACHINES

- The metal thickness of the shell
- The types of bearings
- The type of belts
- The type of steel chosen to produce the cutting knives
- Heat treatments to make them as strong and sharp as long as possible and the wide range of types of machines, to meet the specific needs of the lawn to care.

Agrinova knows that every lawn is different and should be treated according to its needs, so the scarifiers that it produce offer a wide variety of cutting systems.

The know-how gained over many years of experience and comparison with the gardening sector experts led to the development of different working systems, which allow us to treat with maximum efficiency any kind of lawn.



RENTAL

PERFECT FOR RENTAL

- They are handy but robust
- They have professional engines that don't leave you in the lurch (with oil alert)
- They have quality belts
- They mounted wheels with metal hub
- Count-hours on demand



CUTTING SYSTEM



ROTOR SHAFT WITH MOVABLE/FIXED KNIVES



Choice of blade thickness



2,5 mm


(standard)



1,2 mm


(on demand) for blade step 30 mm or 40 mm

- System that allow:
 - Verticutting: Performs a number of cuts on the ground up to a recommended depth of up to 3 cm, but suggest maximum 0,5 cm
 - Removing the moss by touching the ground
- This system is referred FLOATING because even if the impact blades against some of the typical gardens obstacle (superficial roots of plants, heads of sprinklers, curbs, etc ..) will not be damaged, because they rotate on their own center and return to their working position thanks To centrifugal force rising from rotation at 3000 rpm).



SPECIAL SPORTS FIELD

Many customers have chosen for maintenance of the sports field the rotor with close-knit knives (90 blades)

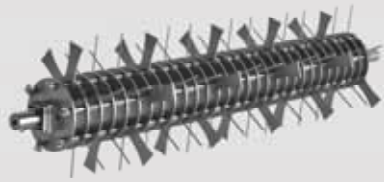

ROTOR WITH SPRING & KNIVES




Often on the meadow there are accumulations of moss and felt, due to the stagnation of water, to the constant presence left to the ground, using the mulching system. Before brushing the grass roots and the first layer of soil, it is necessary to clean the felt sheet. You must comb the grass layer with soft tips such as those of a spring. However, as a result of a high-speed operation, with considerable power provided by the engine, it is necessary to give stiffness to the cutting system by intercepting springs with moving knives. This prevents the system from pushing too much on the springs of the springs avoiding the resulting breakage. This type of cutting system requires little power to the engine and must be made at the lowest possible speeds.

CONSTRUCTIVE DETAILS



Double belt drive

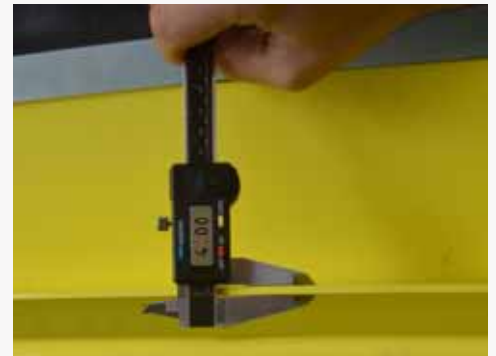

The body is very robust: 4 mm thick - body weight 35 kg.



Balance ballast: to balance the weight of the motor placed on one side of the machine, on the opposite side there is a ballast (different depending on the type of motor chosen).



B & S or Honda Engine - Powerful and Reliable - Choose from 9 to 13 hp. Perfectly dimensioned for these machines.



The cutting system is supported by two cast iron supports and two high quality ball bearings. The greaser, during maintenance, is easy to reach.



Soft rubber wheels that do not damage the grass, anti-puncture. They have ball bearings and are mounted on an axis of 20 mm in diameter.



Working height adjustment system. From sitting on the tractor / quad, the lever can be lifted by the lever so that the knives do not touch the ground.



Adjustable helm attachment to facilitate coupling with any type of tractor or quad.

SERIES	JEREMY
WORKING WIDTH	95cm
ENGINE	Briggs & Stratton serie 1450 (9 hp) - Cod JU949 Honda GX390 (13 hp) - Cod JU950 - H
WEIGHT KG	127 for JU949 - 135 for JU950-H
BEARING	Cast iron support bearing unit
TRANSMISION	with 2 belts
WHEELS	2 soft rubber wheels , on bearing (on axle of 20 mm di diametre)
STANDRAD WORKING SYSTEM	movable knives shaft 25 mm (step 40) (nr 69 knives) Cod AR945
SPECIAL WORKING SYSTEM	movable knives shaft 25 mm (stepp 30) (nr 90 knives) - Cod AR946 shaft knives and springs (nr 29 knives + 58 springs) Cod AR947
SINGLE PACK	123 x 80 x 86 (sin palet)
FULL PALLET WITH 2 BOXES	2 pcs every pallet : 123 x 80 h 172 cm

